

Product datasheet:

Cable glands Progress® nickel-plated brass for installation of multiple cables

Short entry thread Pg

- One-piece sealing insert
- not overall length insulated
- Further versions and entry threads are available upon request.
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	1310.13.3.050
EAN:	7611614138855
Packaging quantity:	50
Price group:	540

Dimensions / Form

Thread:	Pg 13
Spanner size:	24 mm
Dimension H:	23 mm
Thread length L:	6 mm

Connections / Entries

Min. clamping range:	3.5 mm
Max. clamping range:	5 mm
clamp technology:	Compression technology

Features


Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP68
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

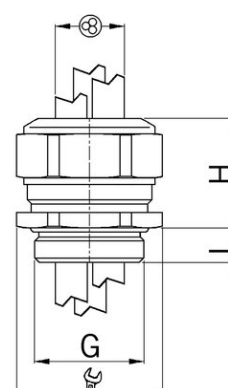

Assembly instructions



Planning data