

## Product datasheet:

# Cable glands Progress® nickel-plated brass for installation of multiple cables

## Long entry thread Pg

- One-piece sealing insert
- not overall length insulated
- Further versions and entry threads are available upon request.
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                      |
|------------------------|----------------------|
| <b>Article number:</b> | <b>1311.13.2.075</b> |
| EAN:                   | 7611614138725        |
| Packaging quantity:    | 50                   |
| Price group:           | 540                  |

### Dimensions / Form

|                  |       |
|------------------|-------|
| Thread:          | Pg 13 |
| Spanner size:    | 24 mm |
| Dimension H:     | 23 mm |
| Thread length L: | 10 mm |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 5.5 mm                 |
| Max. clamping range: | 7.5 mm                 |
| clamp technology:    | Compression technology |

### Features


|                |      |
|----------------|------|
| Thread type:   | Pg   |
| Thread length: | long |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

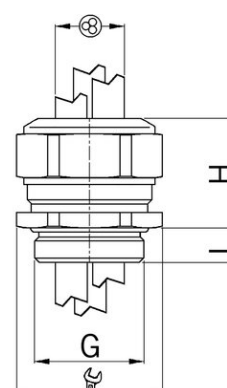

Assembly instructions



Planning data