

Product datasheet:

Cable glands Progress® nickel-plated brass with sealing insert without drilled hole

Short entry thread metric

- One-piece solid sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- When frozen to at least -25°C, the solid sealing inserts are easy to drill.



Article number:	➔ 1000.06.30
E-No:	121144008
EAN:	7611614131450
Packaging quantity:	50

Dimensions / Form

Thread:	M6x1.0
Spanner size:	8 mm
Dimension H:	12 mm
Thread length L:	5 mm

Connections / Entries

Max. clamping range:	3.5 mm
clamp technology:	Compression technology

Features


Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP 69
Protection class with condition:	IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

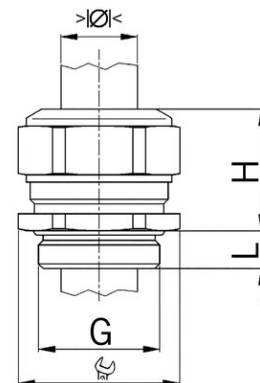

Assembly instructions



Planning data