

Product datasheet:

Cable glands Progress® nickel-plated brass with sealing insert without drilled hole

Short entry thread metric

- One-piece solid sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- When frozen to at least -25°C, the solid sealing inserts are easy to drill.



Article number:  **1000.25.30**

E-No: 121144608

EAN: 7611614131528

Packaging quantity: 25

Dimensions / Form

Thread: M25x1.5

Spanner size: 30 mm

Dimension H: 28 mm

Thread length L: 7 mm

Connections / Entries

Max. clamping range: 20.5 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications


Protection class: IP 69

Protection class with condition: IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

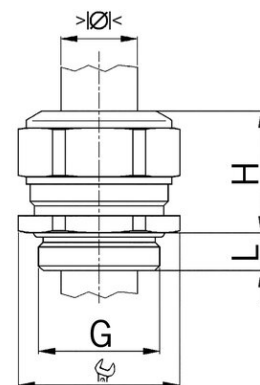

Assembly instructions



Planning data