

## Product datasheet:

# Cable glands Progress® nickel-plated brass with special entry thread

## Specially long entry thread

### Approval type: Progress MS L

- Two-piece sealing insert
- not overall length insulated
- Further dimensions upon request



|                        |                   |
|------------------------|-------------------|
| <b>Article number:</b> | <b>1100.32.50</b> |
| E-No:                  | 121340708         |
| EAN:                   | 7611614124148     |
| Packaging quantity:    | 10                |

### Dimensions / Form

|                       |          |
|-----------------------|----------|
| Thread:               | M32x1.5  |
| Spanner size:         | 46/36 mm |
| Dimension H:          | 28 mm    |
| Measurement value L1: | 40 mm    |
| Thread length L:      | 50 mm    |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 21 mm                  |
| Max. clamping range:            | 25.5 mm                |
| Clamping range with inlet min.: | 17 mm                  |
| Clamping range with inlet max.: | 21 mm                  |
| clamp technology:               | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | long   |

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP 69                 |
| Protection class with condition: | IP 68 (10 bar) / IP69 |
| VDE:                             | Yes                   |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

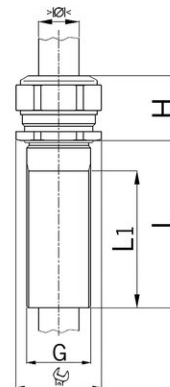

Assembly instructions



Certificates



Planning data