

## Product datasheet:

# Cable glands Progress® nickel-plated brass with antikink nozzle EPDM

## Cable glands Progress® nickel-plated brass with antikink nozzle EPDM

- One-piece sealing insert
- not overall length insulated



|                        |                |
|------------------------|----------------|
| <b>Article number:</b> | <b>1021.51</b> |
| E-No:                  | 121230508      |
| EAN:                   | 7611614049496  |
| Packaging quantity:    | 10             |

### Dimensions / Form

|                      |        |
|----------------------|--------|
| Thread:              | Pg 21  |
| Spanner size:        | 32 mm  |
| Dimension H:         | 33 mm  |
| Measurement value T: | 92 mm  |
| Thread length L:     | 7.5 mm |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 13 mm                  |
| Max. clamping range: | 16.5 mm                |
| clamp technology:    | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | short  |

### Approvals / Certifications

|                   |       |
|-------------------|-------|
| Protection class: | IP 69 |
|-------------------|-------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

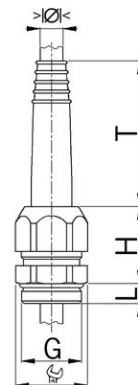

Assembly instructions



Planning data