

Product datasheet:

Cable glands Progress® nickel-plated brass with antikink spring

Short entry thread metric

Approval type: Progress MS FKN

- One-piece sealing insert
- overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- - Short entry thread with short one-piece or two-piece sealing insert.
- - Long entry thread with short or full-length insulating one-piece or two-piece sealing insert.



Article number:	1060.17.52.060
E-No:	121783408
EAN:	7611614195131
Packaging quantity:	10

Dimensions / Form

Thread:	M16x1.5
Spanner size:	18 mm
Dimension H:	66 mm
Thread length L:	5 mm

Connections / Entries

Min. clamping range:	4.5 mm
Max. clamping range:	6 mm
clamp technology:	Compression technology

Features


Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP 69
Protection class with condition:	IP 68 (10 bar) / IP69
VDE:	Yes

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

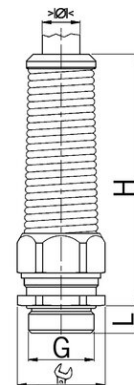

Assembly instructions



Certificates



Planning data