

Product datasheet:

Cable glands Progress® nickel-plated brass with antikink spring

Short entry thread metric

Approval type: Progress MS FKN

- One-piece sealing insert
- overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- - Short entry thread with short one-piece or two-piece sealing insert.
- - Long entry thread with short or full-length insulating one-piece or two-piece sealing insert.



Article number:  **1060.25.52.125**

EAN: 7611614195193

Packaging quantity: 10

Price group: 540


Dimensions / Form

Thread: M25x1.5

Spanner size: 30 mm

Dimension H: 99 mm

Thread length L: 7 mm

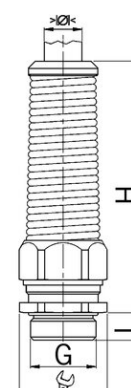

Connections / Entries

Min. clamping range: 9.5 mm

Max. clamping range: 12.5 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP 69

Protection class with condition: IP 68 (10 bar) / IP69

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Certificates



Planning data