

## Product datasheet:

# Cable glands Progress® nickel-plated brass with antikink spring

## Short entry thread Pg

- Two-piece sealing insert
- overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- - Short entry thread with short one-piece or two-piece sealing insert.
- - Long entry thread with short or full-length insulating one-piece or two-piece sealing insert.



**Article number:**  **1060.11.52**

**EAN:** 7611614196305

**Packaging quantity:** 10

**Price group:** 540

### Dimensions / Form

**Thread:** Pg 11

**Spanner size:** 18/21 mm

**Dimension H:** 66 mm

**Thread length L:** 6 mm

### Connections / Entries

**Min. clamping range:** 8 mm

**Max. clamping range:** 10.5 mm

**Clamping range with inlet min.:** 6 mm

**Clamping range with inlet max.:** 8 mm

**clamp technology:** Compression technology

### Features

**Thread type:** metric

**Thread length:** short

### Approvals / Certifications


**Protection class:** IP 69

**Protection class with condition:** IP 68 (10 bar) / IP69

### Storage / Installation / Operation

**Minimum operating temperature:** -40 °C

**Maximum operating temperature:** 100 °C

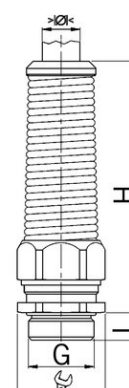

Assembly instructions



Planning data