

Product datasheet:

Cable glands Progress® nickel-plated brass with antikink spring

Short entry thread Pg

- Two-piece sealing insert
- overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- - Short entry thread with short one-piece or two-piece sealing insert.
- - Long entry thread with short or full-length insulating one-piece or two-piece sealing insert.



Article number:  **1060.21.52**

EAN: 7611614196169

Packaging quantity: 5

Price group: 540

Dimensions / Form

Thread: Pg 21

Spanner size: 30 mm

Dimension H: 99 mm

Thread length L: 7.5 mm

Connections / Entries

Min. clamping range: 16 mm

Max. clamping range: 19 mm

Clamping range with inlet min.: 12.5 mm

Clamping range with inlet max.: 16 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications


Protection class: IP 69

Protection class with condition: IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

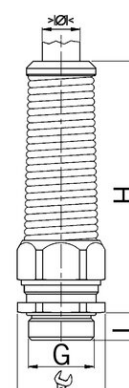

Assembly instructions



Planning data