

Product datasheet:

Divisible frame Hygienic Design Series 1915 with covering mask

Divisible frame Hygienic Design Series 1915

Article number:	➔ 1915.24.C
EAN:	7611614500621
Packaging quantity:	1
Price group:	580

Dimensions / Form

Installation opening (wall/ceiling) length:	112 mm
Installation opening (wall/ceiling) width:	39 mm
Dimension A:	164.25 mm
Dimension B:	78.25 mm
Measurement value C:	28.3 mm
Cover for box/housing/casing Ø:	112x39 mm
Borehole distance X:	130 mm
Borehole distance Y:	32 mm

Safety / Properties

Flammability:	UL 94 HB
---------------	----------

Features

Properties:	Halogen and silicone free
-------------	---------------------------

Approvals / Certifications


Protection class:	IP66
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	80 °C

The frames of the 1915 CLEAN series consist of the well-known frames of the 1910 standard series and an FDA PC mask that fits onto the frame plus specific hygienic grommet inserts. Thus, the solution properly installed, will not just be a cable entry in a different color but a device that meets the Hygienic design needs of food processing machines. The absence of sharp corners, screw seats and the ease of cleaning make it a unique solution. The system allows the use of cables with and without connectors with diameters from 2 to 35 mm.

- easy to clean
- High pull-out forces according to EN 62444
- Without screw seats and sharp corners
- Rear installation with overmolded threaded screws
- Colour black

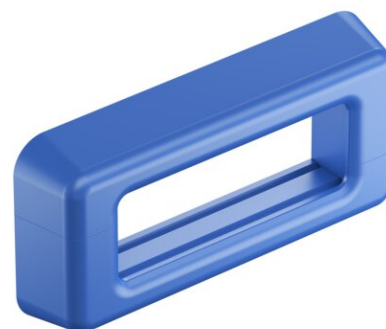

Assembly instructions



Planning data