

## Product datasheet:

# Cable glands Progress® according to EN 45545-2/3 and NFPA 130 EMC easyCONNECT with contact spring

## Long entry thread metric

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Entry thread Pg and NPT
- Executions in steel A2 and A4



**Article number:** **GD F1183.63**

**EAN:** 7611614444505

**Packaging quantity:** 5

### Dimensions / Form

**Thread:** M63x1.5

**Spanner size:** 70 mm

**Dimension H:** 42 mm

**Thread length L:** 14 mm

### Connections / Entries

**Min. clamping range:** 46 mm

**Max. clamping range:** 52 mm

**Clamping range with inlet min.:** 40 mm

**Clamping range with inlet max.:** 46 mm

**clamp technology:** Compression technology

**Contact:** Contact spring

### Features

**Properties:** For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables

**Thread type:** metric

**Thread length:** long

### Approvals / Certifications


**Protection class:** IP69

**Protection class with condition:** IP 68 (10 bar) / IP69

### Storage / Installation / Operation

**Minimum operating temperature:** -50 °C

**Maximum operating temperature:** 105 °C

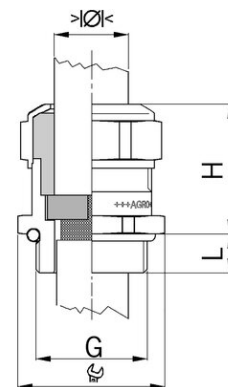

Assembly instructions



Planning data