

Product datasheet:

AGRO cable glands Ex Compact nickel-plated brass flameproof enclosure Ex d IIC and increased safety Ex e II

Entry thread NPT

Approval type: EX Compact MS

- One-piece sealing insert
- not overall length insulated
- Stainless steel A2 or A4



Article number: [EX1126.11/2NPT.360](#)

EAN: 7611614313627

Packaging quantity: 5

Dimensions / Form

Thread:	NPT 1 1/2"
Spanner size:	55 mm
Dimension H:	34 mm
Thread length L:	20 mm

Connections / Entries

Min. clamping range:	28 mm
Max. clamping range:	36 mm
clamp technology:	Compression technology

Features


Thread type:	NPT
--------------	-----

Approvals / Certifications

Protection class:	IP67
Protection class with condition:	IP 66 - IP 68 (30 bar)
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex db eb IIC Gb
Dust:	II 2D Ex ta IIIC
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx PTB 12.0055X
Further certifications:	PTB 10 ATEX 1034X
Connectivity certification:	PTB 10 ATEX 1034X

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	105 °C

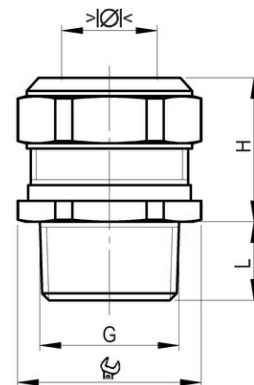

Assembly instructions



Certificates



Planning data