

## Product datasheet:

# AGRO cable glands Progress® nickel-plated brass increased safety Ex e II

## Long entry thread metric

### Approval type: Progress MS EX

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread
- Executions in steel A2 and A4, entry thread NPT



**Article number:** EX1100.25.125

E-No: 121391608

EAN: 7611614177649

Packaging quantity: 25

### Dimensions / Form

Thread: M25x1.5

Spanner size: 30 mm

Dimension H: 25 mm

Thread length L: 11 mm

### Connections / Entries

Min. clamping range: 9.5 mm

Max. clamping range: 12.5 mm

clamp technology: Compression technology

### Features

Thread type: metric

Thread length: long

### Approvals / Certifications

Protection class: IP66

Protection class with condition: IP 66 - IP 68 (10 bar)

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex eb IIC Gb


Dust: II 2D Ex tb IIIC Db

Test standard: IEC EN 60079-7

IECEx certification: IECEx SEV 15.0019X

Further certifications: SEV 15 ATEX 0152X

Connectivity certification: SEV 15 ATEX 0152X

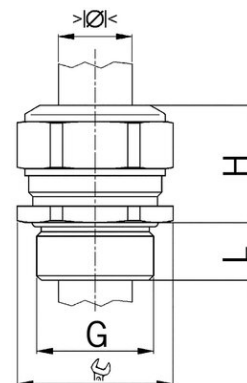

Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |