

Product datasheet:

AGRO synthetic cable glands Progress® GFK increased safety Ex e II

Entry thread metric

Approval type: Progress GFK EX

- Black RAL 9005
- One-piece sealing insert
- 3 = Material sealing insert NBR

Article number: **EX1540.50.390**

EAN: 7611614176468

Packaging quantity: 10

Price group: 530

Dimensions / Form

Thread: M50x1.5

Spanner size: 60 mm

Dimension H: 42 mm

Thread length L: 16 mm

Connections / Entries

Min. clamping range: 37 mm

Max. clamping range: 39 mm

clamp technology: Compression technology

Features

Properties: halogen-free

Thread type: metric

Approvals / Certifications

Protection class: IP66

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex eb IIC Gb

Dust: II 2D Ex tb IIIC Db

Test standard: IEC EN 60079-7

IECEx certification: IECEx SEV 15.0019X


Further certifications: SEV 15 ATEX 0152X

Connectivity certification: SEV 15 ATEX 0152X

Storage / Installation / Operation

Minimum operating temperature: -20 °C

Maximum operating temperature: 85 °C

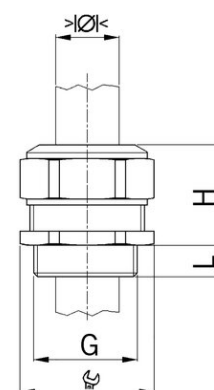

Assembly instructions



Certificates



Planning data