


Product datasheet:

Flush-mounted junction box - 115mm - for flexible corrugated plastic conduits (KRFG)

Efficient installation and increased reliability thanks to innovative two-part design

- The conduit entries are secured against accidental opening due to impacts from reinforcement steel or kicks
- Open conduit entries are easily identified during inspections thanks to the junction box's two colours
- Horizontal and vertical slits in the sealing membrane enable the marking cross on the formwork to be seen through the membrane
- Two-part design
- Version with tunnel extension (Art.-No. 9907.30) accommodates a driver for LED strip lighting in residential buildings

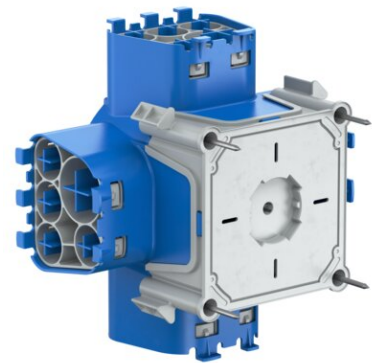

Article number: 9907.20

E-No: 155011198

EAN: 7611614482200

Packaging quantity: 12

Dimensions / Form

Product length: 115 mm

Product width: 115 mm

Product depth: 115 mm

Connections / Entries

For conduit Ø: 40 mm

Assembly / Installation

Assembly type: BB (solid construction)

Safety / Properties

Special application: on-site mixed concrete

The flush-mounted junction box (Art.-No. 9907.20) offers a variety of advanced features, making it an ideal choice for electrical installers. A key characteristic of this innovative product is its two-part design, which facilitates optimal alignment and installation. The front part can be easily nailed onto the formwork, ensuring precise positioning. The other part is then simply snapped onto the front part. Other features that are designed to meet the requirements of modern installation work include the sixteen M20/25 combination entries and four M32/40 combination entries for flexible corrugated plastic conduits.



Certificates



Planning data