


Product datasheet:

Prefix® concrete construction box 1x1 / Ø 30 mm

Prefix concrete installation socket

- Compatible with Feller SNAPFIX®
- Fast and easy installation on opposing formwork without support element and abutment
- Holding in place using the Prefix® installation technology leaves both hands free for securing with tie wires
- Several units can be securely joined together to form norm-compliant combinations
- For device screws Ø 3 mm
- Max. tightening torque 0.5 Nm

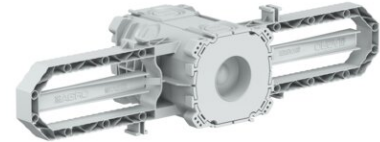

Article number: **9940**

EAN: 7611614251127

Packaging quantity: 10

Price group: 130

Dimensions / Form

Product depth: 97 mm

Assembly / Installation

Assembly type: BB (solid construction)

Safety / Properties

Special application: on-site mixed concrete

Inlet box with Prefix® installation technology, for quick and easy installation against subsequently placed front formwork - without separate supporting element. Thanks to its spring-loaded wing brackets, this one-piece socket with two integrated front parts can be installed in such a way that its front surface will be pressed hard against the front formwork when it is subsequently placed, ensuring the socket will sit just right against the formwork and resulting in a smooth, clean finish after concreting.

- Compatible with Feller SNAPFIX®
- Easy and quick installation
- Pre-fixing by means of B¹ Prefix® installation technology
- For exposed concrete
- Can be combined



Certificates



Planning data