

Product datasheet:

Universal installation housing

Universal installation housing


- Suitable for installation in horizontal or vertical formwork and in masonry
- Two-part, consisting of a housing and a mineral fibreboard cover
- Optional accessory: Set of Prefix® wing brackets

concrete construction, universal installation housing, 258 x 188 x 200 mm, 2-piece
Universal installation housing for concrete construction installation, on-site mixed concrete, fixing to formwork

Concrete construction box, designed as a universal installation housing with mineral fibreboard, made of plastic, with four slots for two Prefix® wing sets (9940.20)

Length 258 mm, width 188 mm, depth 200 mm, for installation openings up to max. 194 x 188 mm, device installation depth max. 105 mm

Insertion markings for electrical installation conduits (4 x up to 20 mm, 20 x up to 25 mm, 8 x 32 mm, 8 x 40 mm and 4 x up to 50 mm) and 8 large break-out openings, protection class IP 30 according to DIN EN 60529, flame-retardant according to DIN EN 60695 up to 650° C, halogen-free according to DIN VDE 0604-2-100, for on-site mixed concrete construction installation

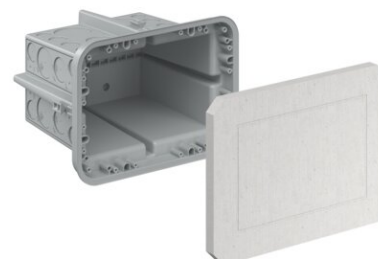

Planning data

Article number: **1298-38**

EAN: 4013456543829

Packaging quantity: 10

Price group: 130

Dimensions / Form

Product length: 258 mm

Product width: 188 mm

Product depth: 200 mm

Installation opening (wall/ceiling) length: 194 mm

Installation opening (wall/ceiling) width: 124 mm

Cover for box/housing/casing Ø: 194x124 mm

Connections / Entries

For conduit Ø: M50

Assembly / Installation

Assembly type: BB (solid construction)

Wall thickness min.: 240 mm

Wall thickness max.: 240 mm

Safety / Properties

Special application: on-site mixed concrete

Universal installation housing for the installation of almost all device types and shapes in concrete walls and ceilings. The housing system consists of nine different installation housings and an extensive range of accessories.

- For displays, LED lights and much more
- For installing almost all shapes and sizes
- For installation in walls or ceilings

Product datasheet:

- For in-situ or prefabricated concrete
- For horizontal or vertical formwork and for masonry